

TwinPoint Gen2
WOOD PANELS



Folding door lock with internal and external access

centor®

| | |
|---|---------|
| File download information | 3 |
| <hr/> | |
| Product details | |
| Exploded view | 4 - 7 |
| Assembly detail | 8 - 9 |
| Lock cylinder | 10 - 13 |
| Bolt, cup and plate | 14 |
| <hr/> | |
| Routing details | 15 - 20 |
| <hr/> | |
| Lock cylinder handing | |
| Lock handing definition | 21 |
| Handing details | 22 - 25 |
| Lock position to suit folding hardware | 26 - 27 |
| <hr/> | |
| Instructions | |
| Formulas and limits | 28 - 29 |
| Assembly | 30 - 33 |
| Installation | 34 - 35 |
| <hr/> | |
| Hardware selection - folding doors | 36 - 47 |

LOCK CYLINDER DETAILS


Double cylinders – outward & inward

Cylinder item number: TPL-050-*

| | | | | | | | | | | | | | | |
|----------------------------|----|----|----|----|----|----|----|----|----|----|----|----|---|---|
| Panel thickness | 54 | 55 | 56 | 57 | 58 | 59 | 60 | 61 | 62 | 63 | 64 | 65 | | |
| Cylinder length | 65 | | | | 70 | | | | 75 | | | | | |
| Cylinder protrusion | 3 | 2 | 1 | 0 | -1 | 4 | 3 | 2 | 1 | 0 | -1 | 4 | 3 | 2 |

| | | | | | | | | | | | | | | | | | | |
|----------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|
| Panel thickness | 66 | 67 | 68 | 69 | 70 | 71 | 72 | 73 | 74 | 75 | 76 | 77 | 78 | 79 | 80 | | | |
| Cylinder length | 75 | | | 80 | | | | 85 | | | | 90 | | | | | | |
| Cylinder protrusion | 1 | 0 | -1 | 4 | 3 | 2 | 1 | 0 | -1 | 4 | 3 | 2 | 1 | 0 | -1 | 4 | 3 | 2 |

| | | | | | | | | | | | | | | | | | | | | | |
|----------------------------|----|----|----|----|----|----|----|-----|----|----|----|----|-----|----|----|----|----|----|---|---|----|
| Panel thickness | 81 | 82 | 83 | 84 | 85 | 86 | 87 | 88 | 89 | 90 | 91 | 92 | 93 | 94 | 95 | 96 | 97 | 98 | | | |
| Cylinder length | 90 | | 95 | | | | | 100 | | | | | 105 | | | | | | | | |
| Cylinder protrusion | 1 | 0 | -1 | 4 | 3 | 2 | 1 | 0 | -1 | 4 | 3 | 2 | 1 | 0 | -1 | 4 | 3 | 2 | 1 | 0 | -1 |

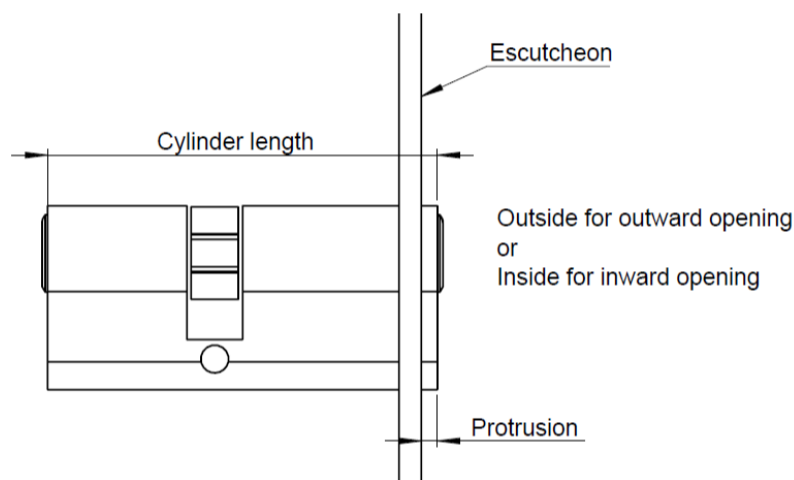

Lock cylinders are produced in increments of 5mm which means there are design choices at the transition between panel thicknesses.

Example 58mm thick panel

Options

1. Change panel thickness to either 57 or 59mm.
2. Select 65mm long cylinder. The cylinder is recessed 1mm below the escutcheon and may be considered substandard.
3. Select 70mm long cylinder. The cylinder protrudes 4mm past the escutcheon which may contravene local security standards.

Centor UK Ltd

Birmingham
+44 (0) 121 701 2500
mail.uk@centor.com
centor.com

Centor Europe Sp zo.o

Stryków
+48 42 206 8810
mail.ce@centor.com
centor.com